
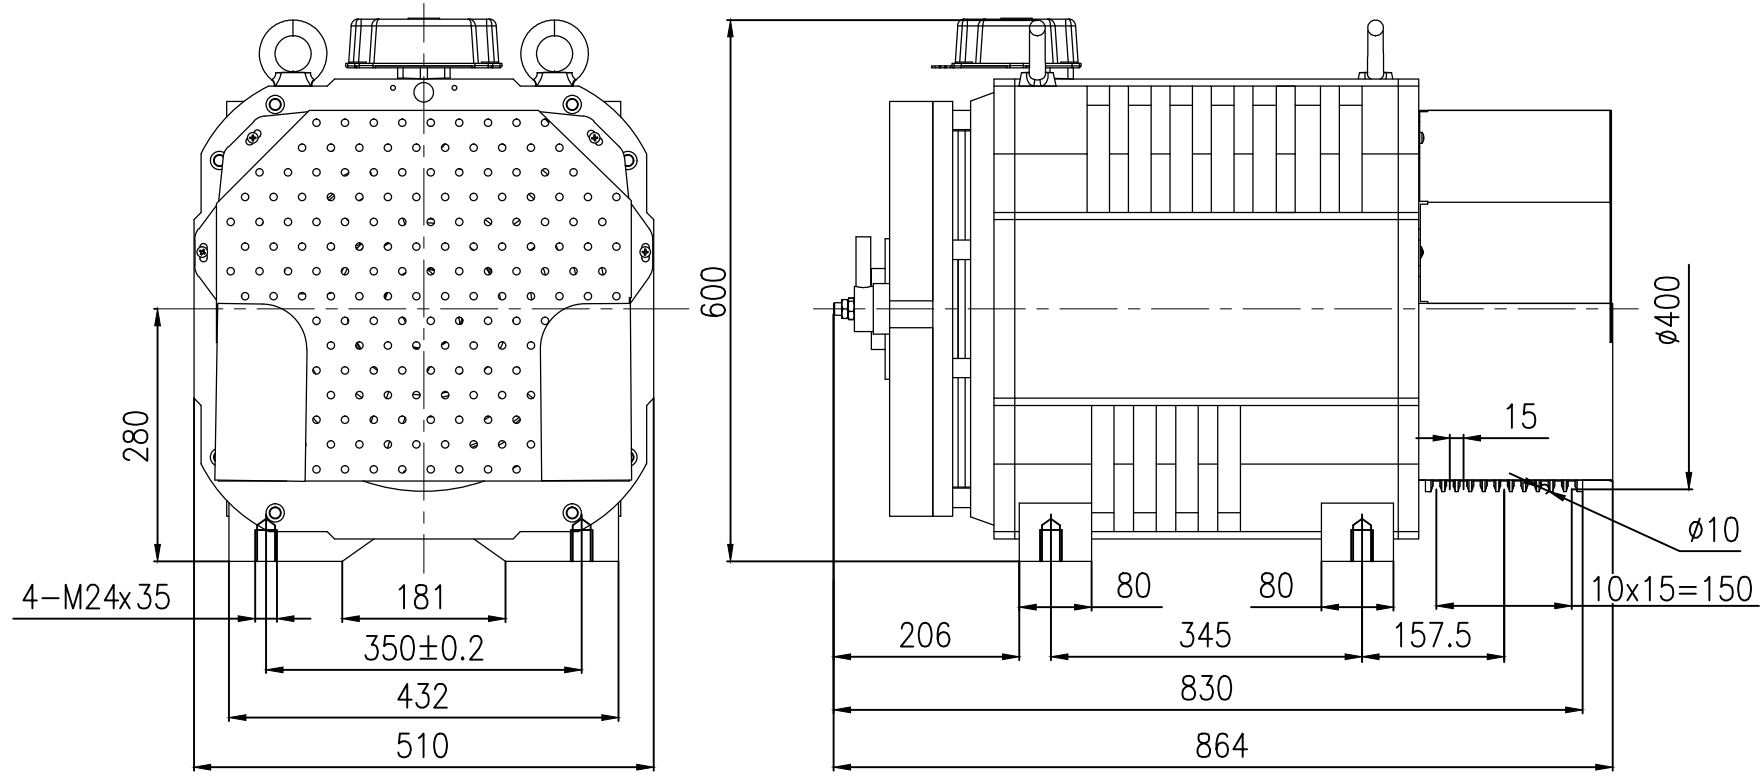


WARNING:
CEG Motor (SUZHOU)
Co., LTD.,
to file and
contains
data
ownership,
can only be
used in the
scope of
the company
for the
purpose;
Without
prior
written
authorization,
shall not
copy or
disclose all
and part
information;
And must be
returned in
time
related
information
and copy to
CEG Motor (SUZHOU)
Co., LTD.,

Basic dimensions L/D	Unmarked tolerance TOL
0.5-6	±0.1
>6-30	±0.2
>30-120	±0.3
>120-400	±0.5
>400-1000	±0.8
>1000-2000	±1.2
>2000-4000	±2
Round/ Chamfering R/C	Unmarked tolerance TOL
0.5-3	±0.2
>3-6	±0.5
>6	±1.0
Short side length LESS	Unmarked tolerance TOL
>0-10	±1°
>10-50	±0.5°
>50-120	±0.3°
>120-400	±0.15°
>400	±0.1°



Model	Load	ΦD	Groove profile	φd	α	β	P
CSAG-W400	2500kg	Φ400	U	10	35°	96°	15

CSAG-W400(SUSPENSION 2:1)Permanent Magnet Synchronous Gearless Traction Machine

Spec.	Load	Speed	Height	Toque	Sheave Dia.	Rope Dia.	Groove	Ditance Between Groove	Power	Rated Voltage	Rated Current	Rated Frequency	Rated Speed
	kg	m/s	m	Nm	mm	mm	pcs	mm	kW	V	A	Hz	rpm
CSAG-W400. 2500. 100	2500	1	≤50	1671	400	10	11	15	16.7	380	34.4	19	95

										Part Name		Drawing No	
										Outline drawing		A210223001	
										Model	Material	Scale	
										CSAG-W400. 2500. 100		1: 1	
										Total pages	Page	Weight	
										1	1		
A0										CEG Motor (SUZHOU) Co., LTD			
Version No.	Mark	NO.	Change the content		Person in charge	Date	First drawing date		2024.8.30				